

# **How to connect with Bluetooth HID (IOS)**

**Version 1.0**

**May - 22**

## Table of Contents

Copyright.....	3
Service Information.....	3
Revision History.....	3
Overview.....	4
Operation.....	4

## Copyright

GENERALSCAN reserves the right to make changes to any product to improve reliability, function, or design.

GENERALSCAN does not assume any product liability arising out of, or in connection with, the application or use of any product, circuit, or application described herein.

## Service Information

If there is a question with the barcode scanner, you can visit website for the live chat at: [www.generalscan.com](http://www.generalscan.com)

## Revision History


Version	Date	Description
1.0	MAy-22	Initial Release

## Overview

This file is used to introduce how to use “Bluetooth HID Mode” of scanner to connect with IOS device.

## Operation

Step1: Scan “Default Factory Setting” , after scanning, the blue indicator light will be in quickly flashing status.

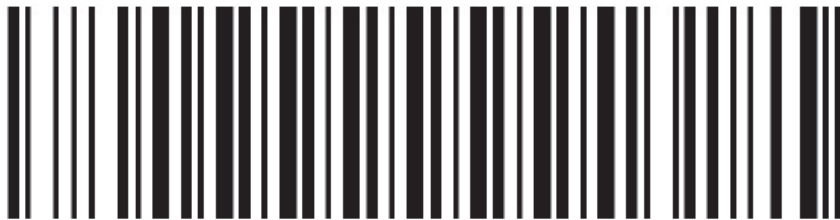


**Default Factory Setting**

Step2: Scan the barcode of “Bluetooth HID Mode”, observe the blue indicator light of the scanner is in quickly flashing status.



**Bluetooth HID Mode(\*)**


Step3: Open the "Settings" of mobile phone.

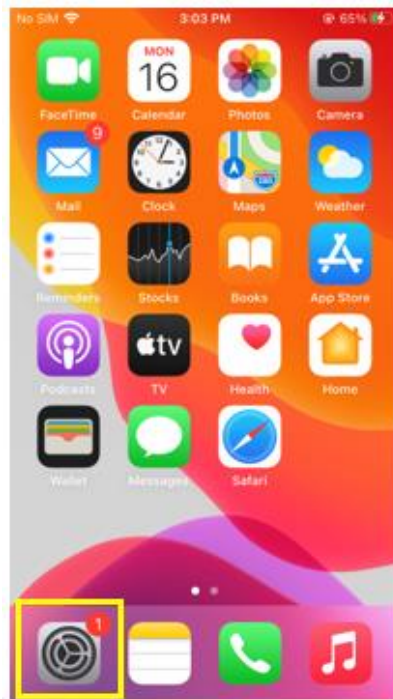


Step4: Choose "Bluetooth"



Step5: Choose scanner connection.

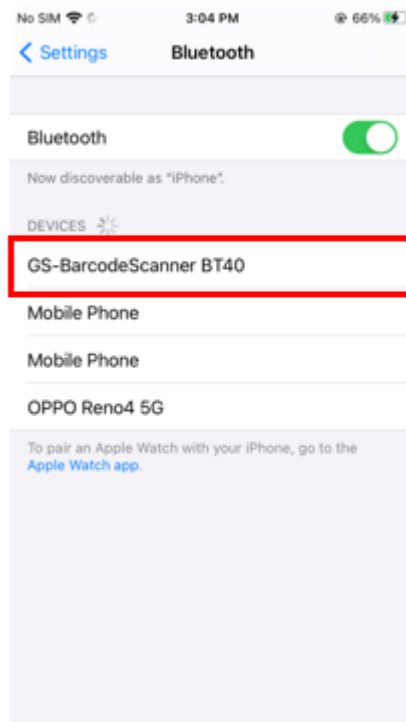

Step6: Scanner connects successfully, blue indicator light goes out.

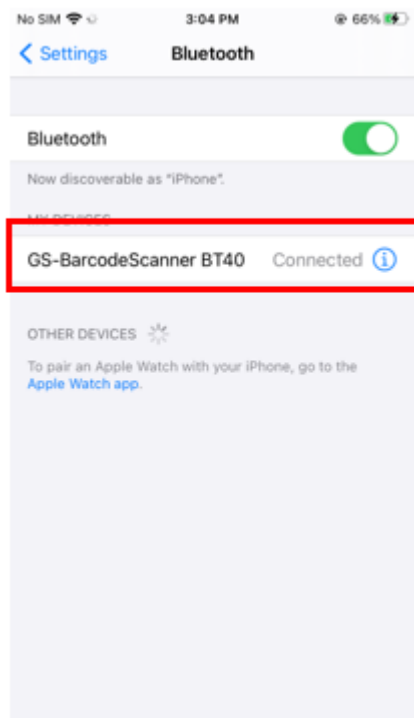

Step7: Open the files that need to input data, change the input method into English input method, there should be cursor appears in the file. Using the scanner to scan the barcode, can get the data output.

