

How to use USB-HID

Version 1.0

May - 22

Table of Contents

Copyright.....	3
Service Information.....	3
Revision History.....	3
Overview.....	4
Operation.....	4

Copyright

GENERALSCAN reserves the right to make changes to any product to improve reliability, function, or design.

GENERALSCAN does not assume any product liability arising out of, or in connection with, the application or use of any product, circuit, or application described herein.

Service Information

If there is a question with the barcode scanner, you can visit website for the live chat at: www.generalscan.com

Revision History


Version	Date	Description
1.0	May-22	Initial Release

Overview

This file is used to introduce how to use USB-HID Mode of scanner.

Operation

Step1: Scan “Default Factory Setting” , after scanning, the blue indicator light will be in quickly flashing status.

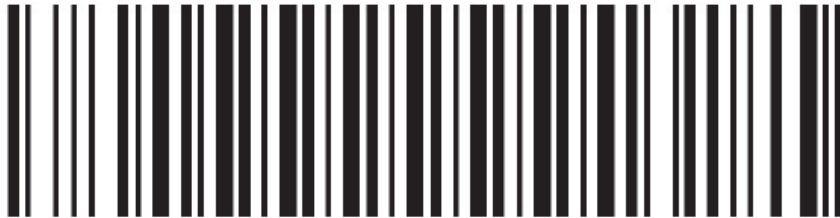

Default Factory Setting

Step2: Scan the barcode of USB-HID Mode, observe the blue indicator light of the scanner goes out.



USB-HID Mode

Step3: Connect the scanner to computer by using Type-C, can hear one long and two short voice, accompany with the green lights goes on and the vibrator vibrates.



Step4: Change the input method of computer to English (United States) input method



Step5: Create a text file, open the text, scan the barcode, can get input information.

